


04 Chair Installations



1. When positioning the chair, please leave 80cm of space behind the backrest to allow free reclining of the backrest.
2. Unplug from outlet when installing the Chair parts.


Step 1: Install one side panel, tighten it with two socket head screws

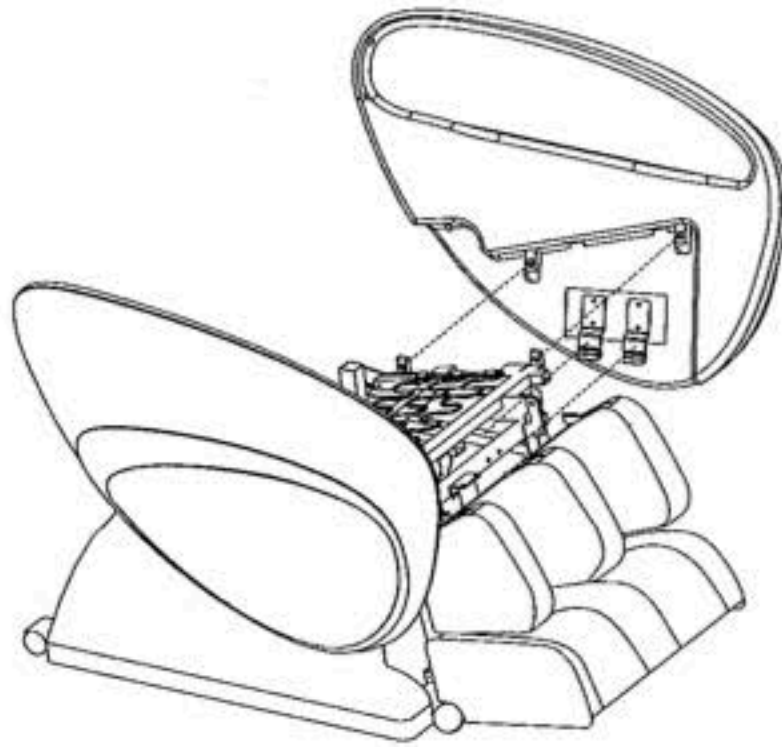


Step 2: Insert and connect the backrest to the bottom seat, and fasten the backrest into the allocated slot.




Step 3: Connect and lock backrest to bottom seat then secure position.

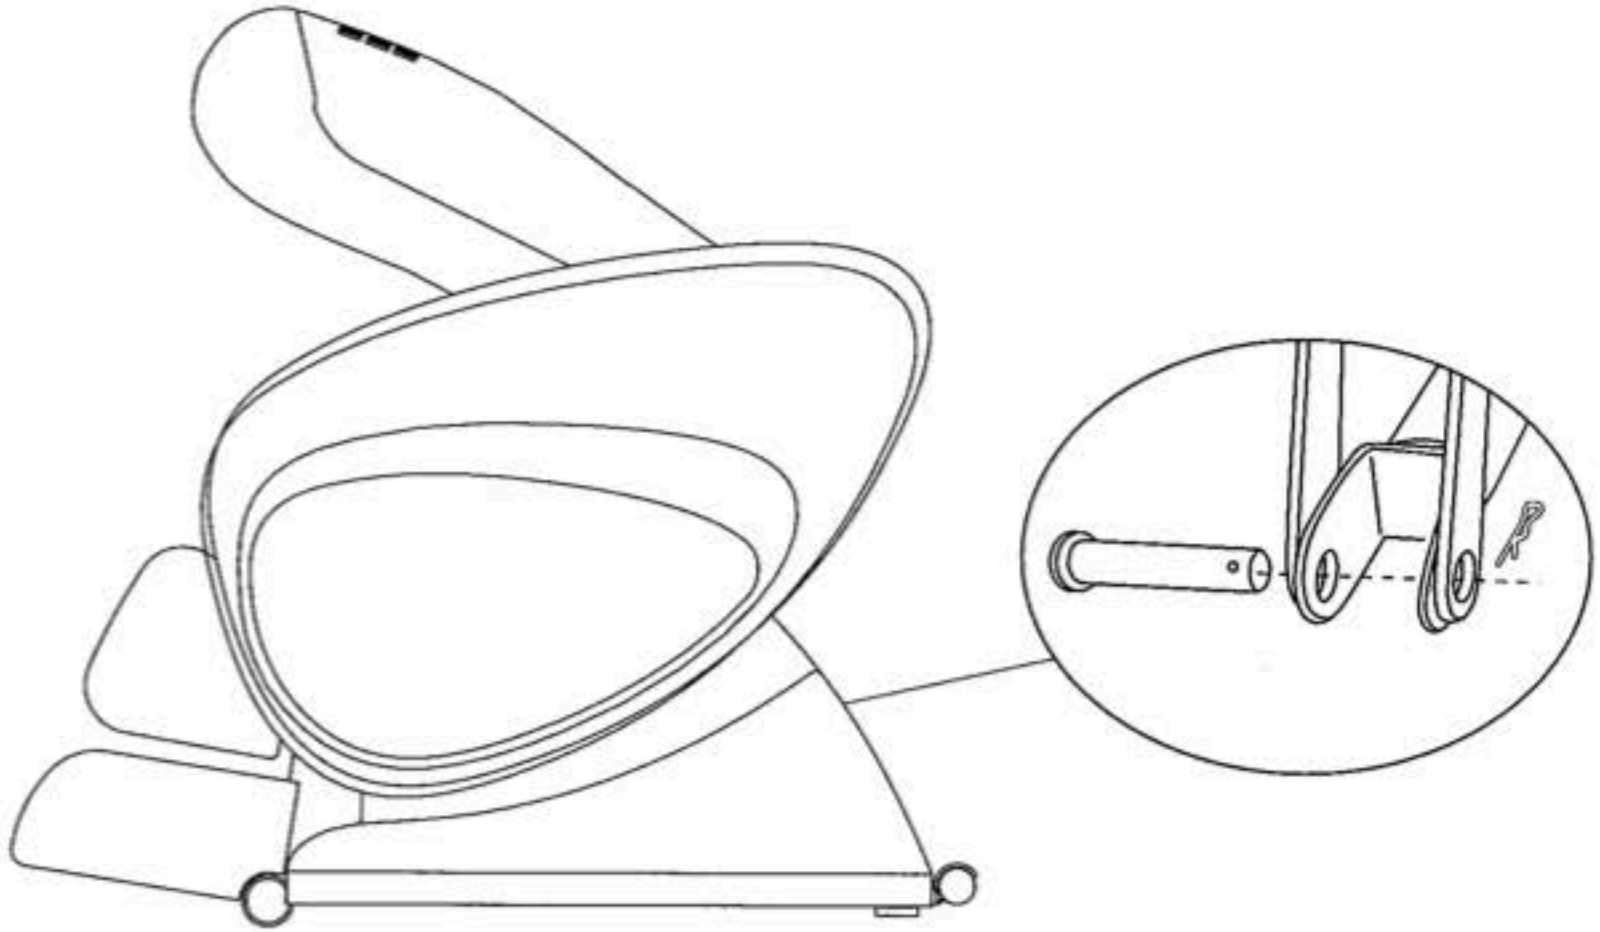


Step 4: Connect the plugs to the corresponding place in the seat according to the marks given.

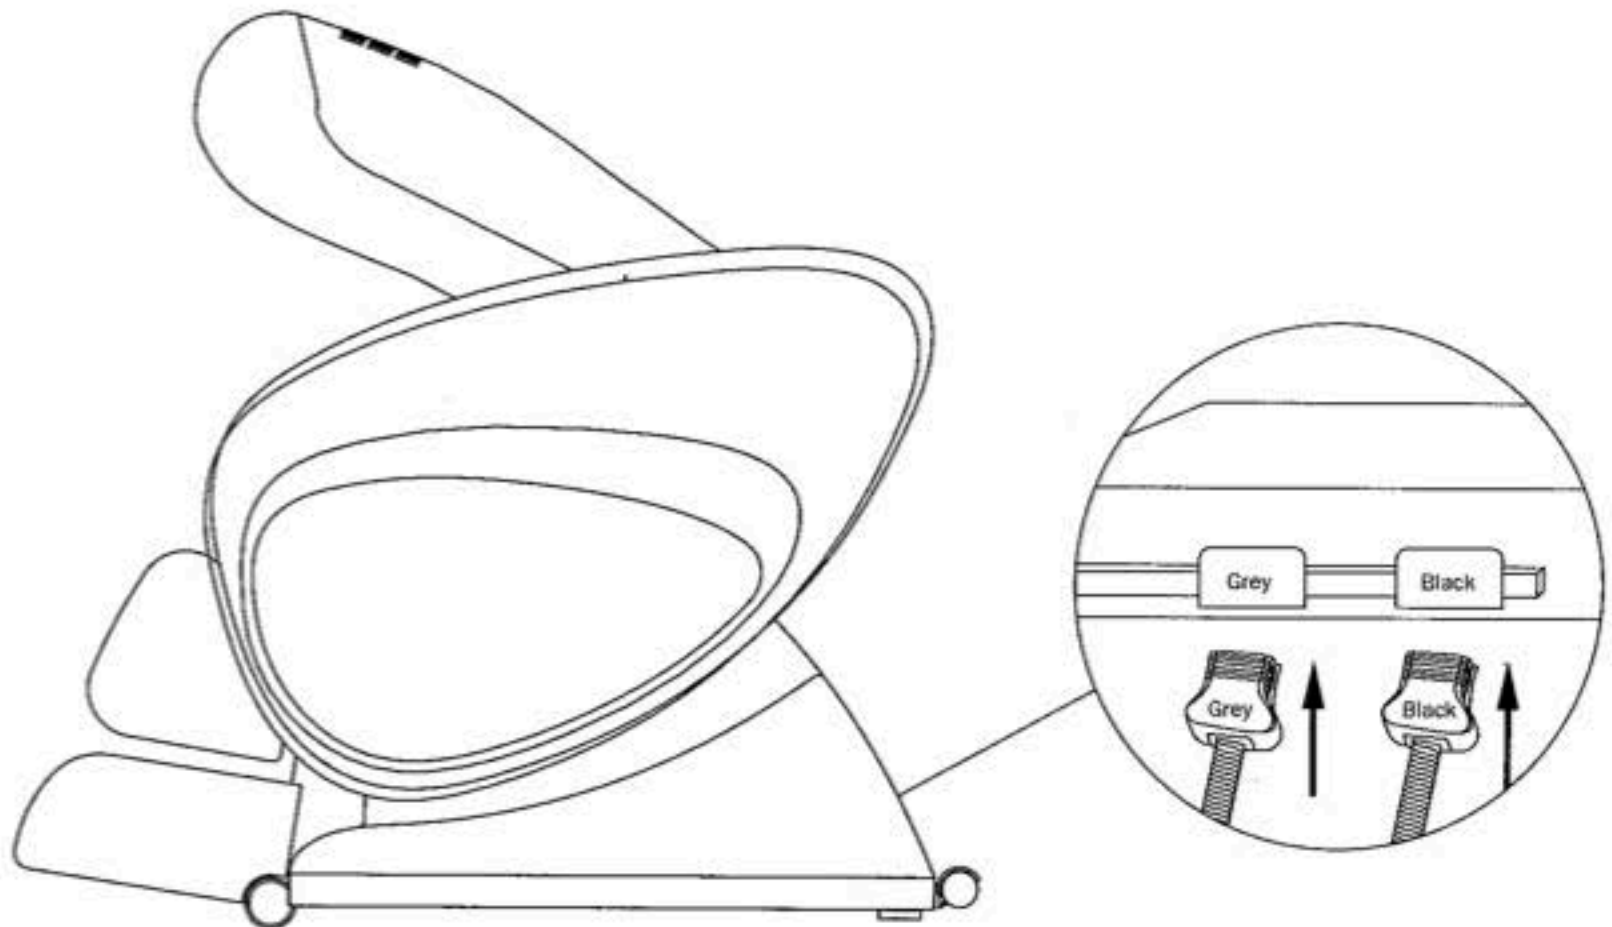


Step 5: Unfold the backrest until you hear it click into place.

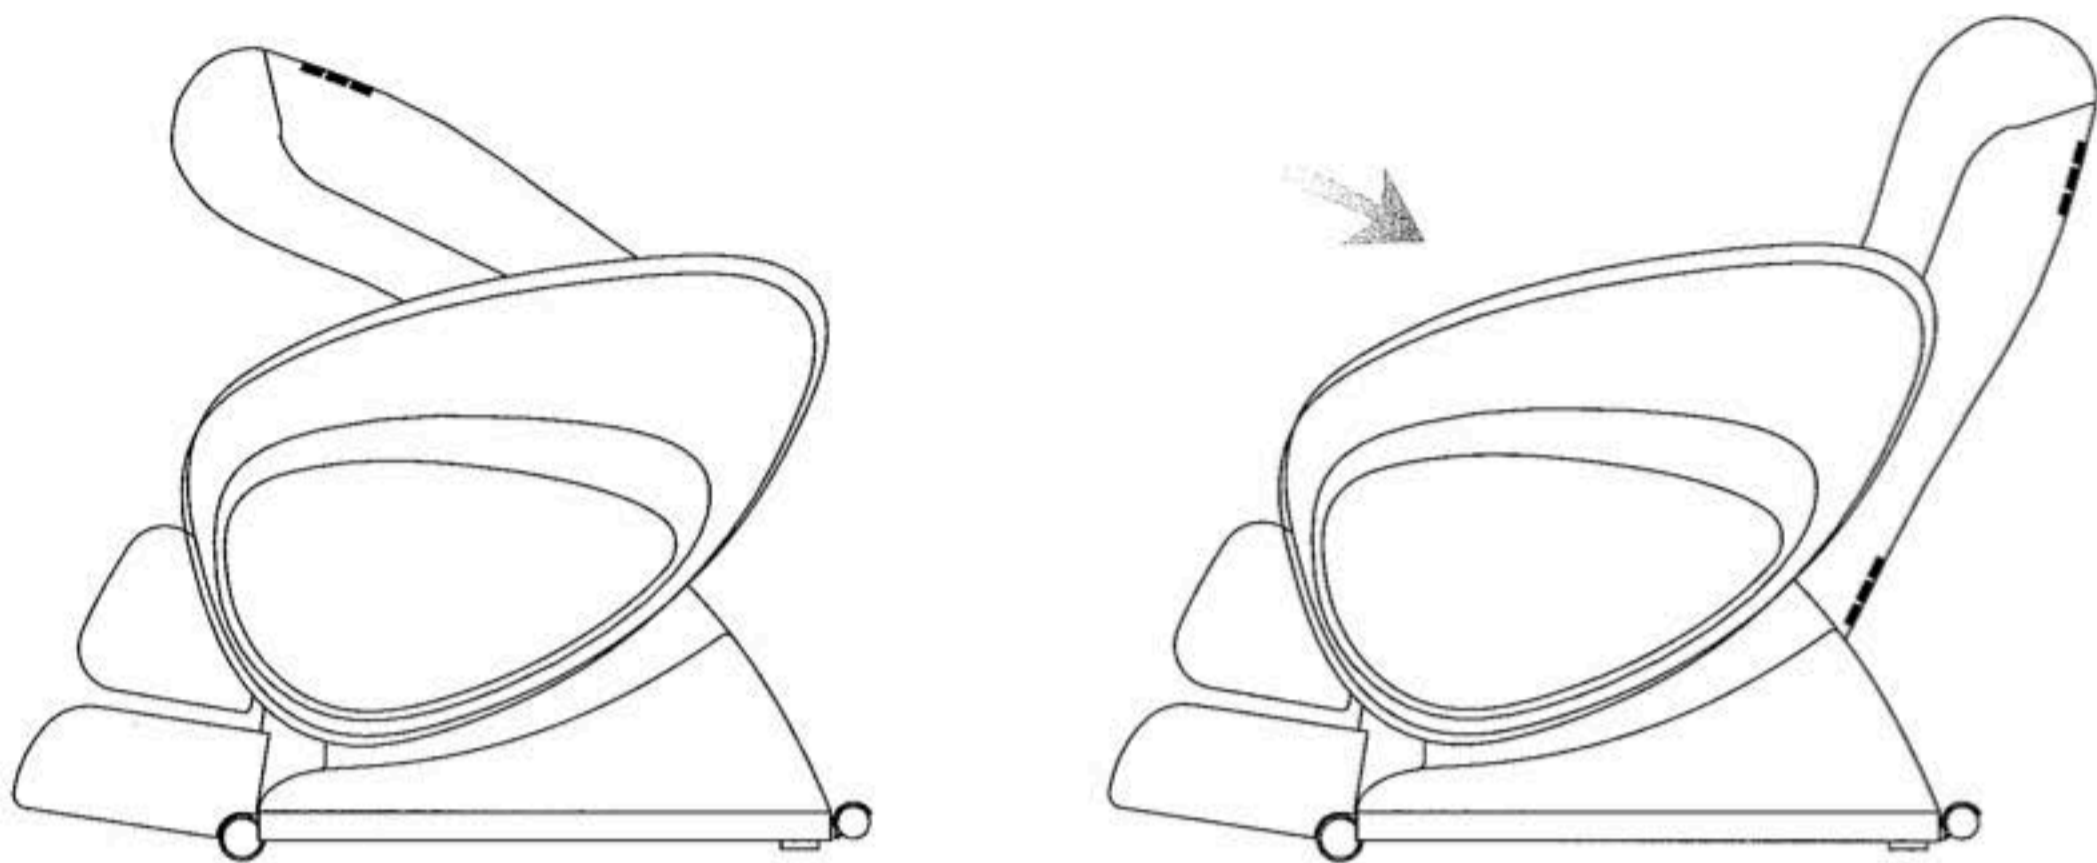


Step 6: Tighten the remote control holder with four screws. Tighten the placer of remote control holder in the top of supporter with screws.

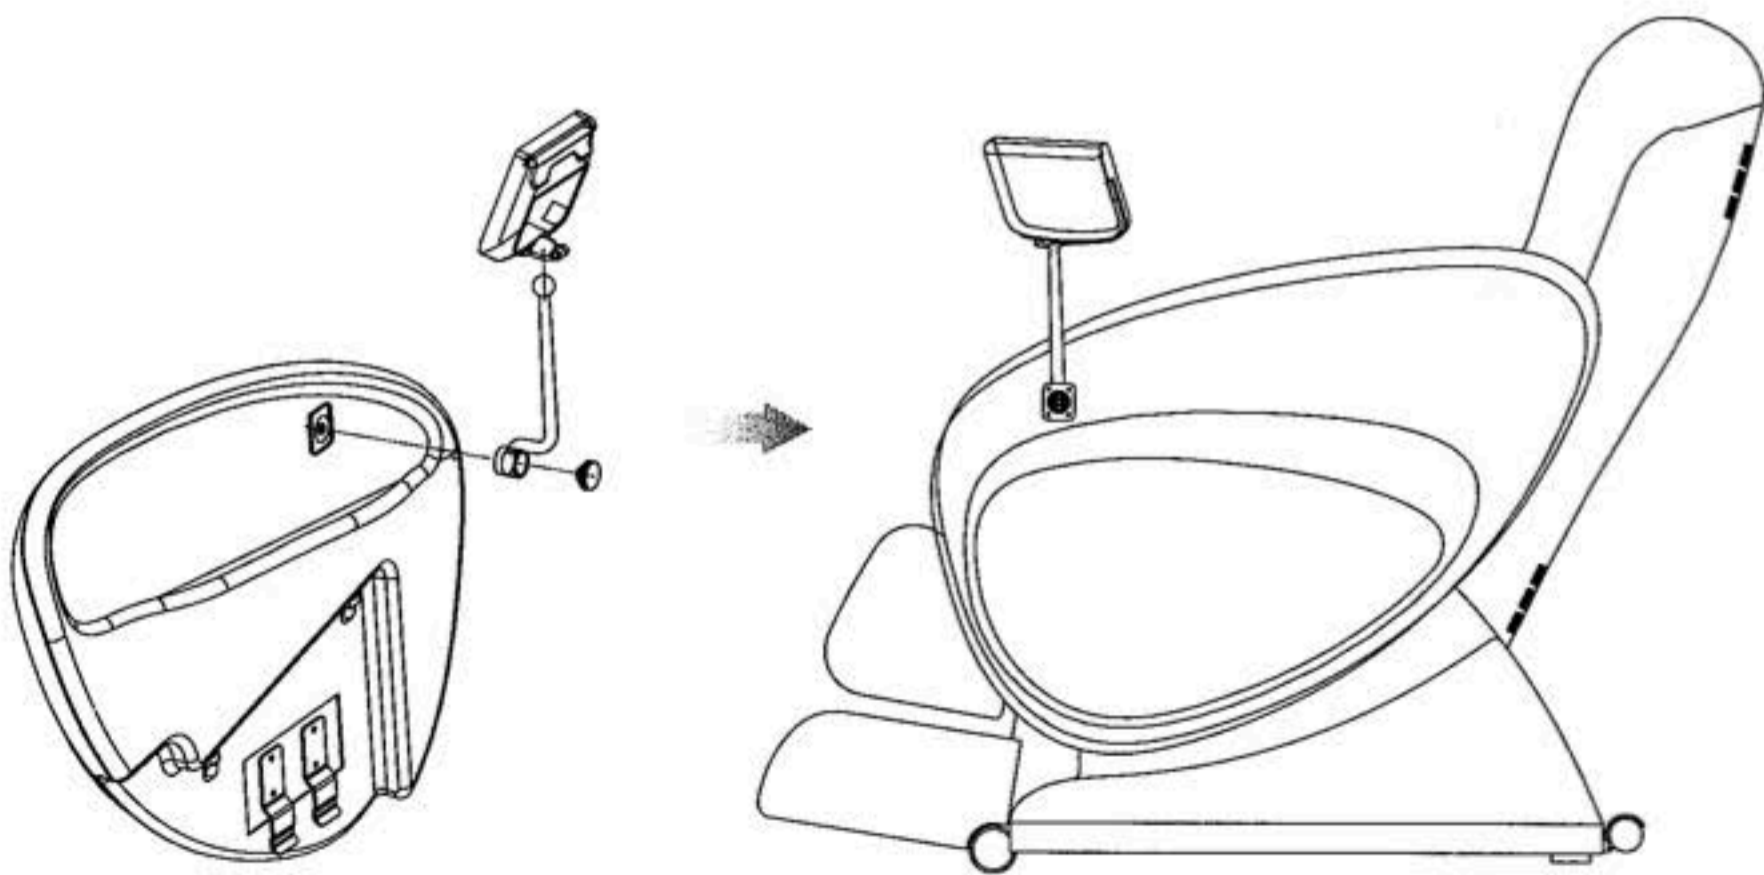

Step 7: Connect the cover to the backrest with the zipper.

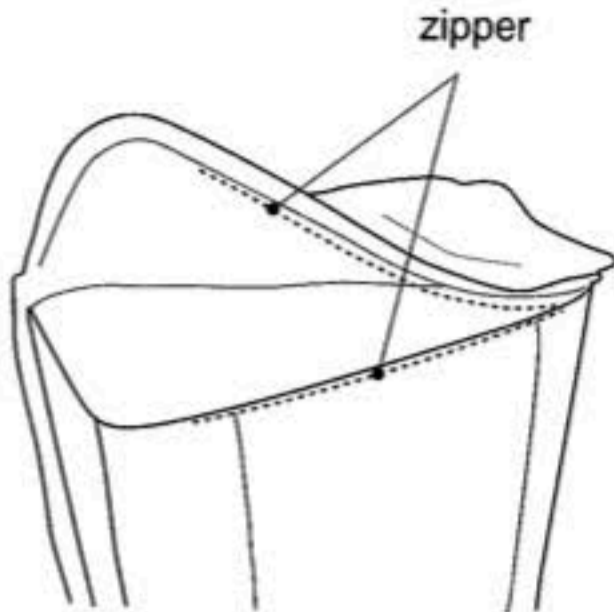

Step 8: Clip joint the pillow to the backrest cover.

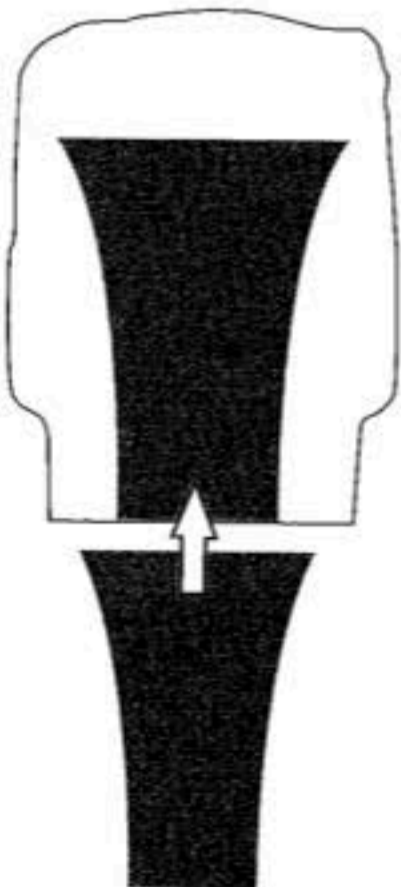

The back massage strength-control pad has been inserted into the backseat cover.

If strong massage is desired, remove the back massage strength-control pad from the cover; this strengthens the massage. If milder massage are desired, insert the back massage strength-control pad into the cover; this lessens the strength of the massage.

Moving the Chair

1. Lift up the Calves Rest.
2. Then recline the chair to approximately to 45 degrees, so that you can easily move the chair around the house with a slight pull push.

Caution:

- 1) Before you move the chair, please put the footrest back into the original position first. Otherwise, injuries might occur in the process of moving.
- 2) Avoid moving the massage chair when there is someone seated on it.
- 3) Placing a mat underneath the massage chair is advisable, as the moving process might leave scratches on the floor surface.

Step 1



Step 2

